


ST-WF05-881S

Cavity Band Pass Filter

Specifications

| Serial | Parameters | |
|--------|--------------------------|---|
| 1 | Center Frequency (F0) | 881.5MHz |
| 2 | Pass Band Frequency | 869~894MHz |
| 3 | Pass Band Insertion Loss | ≤1.5dB |
| 4 | Pass Band VSWR | ≤1.3:1 |
| 5 | Stop Band Rejection | ≥45dB @ Fc ± 10MHz (DC~859MHz、904~2000MHz) |
| 6 | Impedance | 50 ohms |
| 7 | Power Handling | ≤25W |
| 8 | Connectors | SMA-Female |
| 9 | Surface Finish | Black Paint |
| 10 | Net Weight | TBD |
| 11 | Configuration | As Below (Size Unit: mm) |

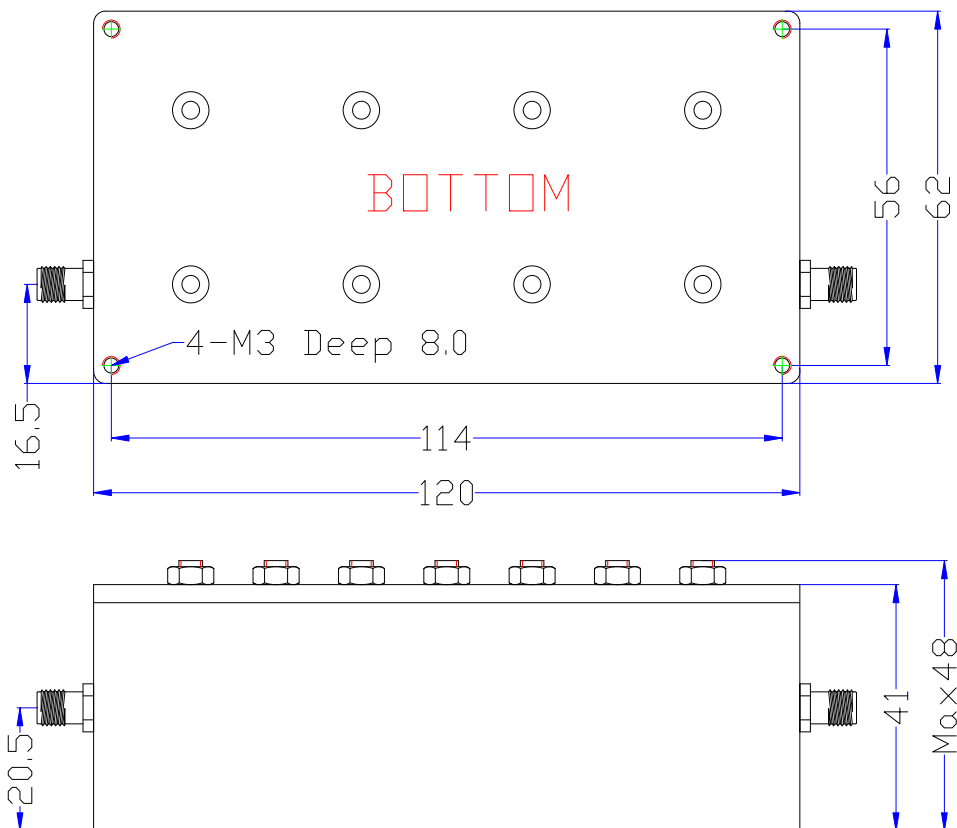

Performance

