


# ST-WF08-1810S

## Cavity Band Pass Filter

### Specifications

Serial	Parameters	
1	Center Frequency (F0)	1810MHz
2	Pass Band Frequency	1790~1830MHz
3	Pass Band Insertion Loss	≤1.5dB
4	Pass Band VSWR	≤1.3:1
5	Stop Band Attenuation	≥20dB @ DC~1760MHz ≥20dB @ 1860~4000MHz
6	Impedance	50 ohms
7	Power Handling	≤10W
8	Connectors	SMA-Female
9	Operating Temperature	-10°C ~ +40°C
10	Surface Finish	Black Paint
11	Net Weight	TBD
12	Configuration	As Below (Size Unit: mm)

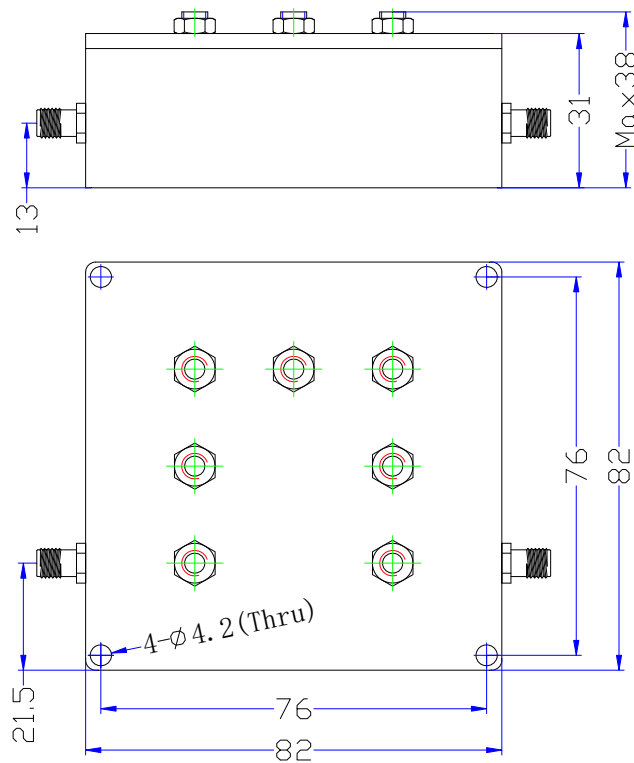

## Performance

